


# Fuel & oils

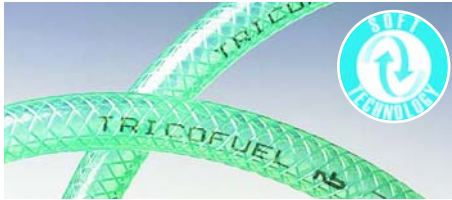

## TRICOFUEL®

+60  
°C  
-15

B.P.  
**25/40**  
bar

**All fuel lines :**

- For pumps, circulation pumps, burners, vine heaters
- For frost prevention, heating equipment...
- Transfer of certain chemical products : petrols, certain acids and certain bases, oils, alcohols...(not suitable for aromatic hydrocarbons)

**All sectors of activity :**

- Automotive industry, assembly plants, plastics industry, food production industry, construction
- Garages (for cars, lorries & agricultural machinery)
- Woodworking, etc...

**Transparent hose for hydrocarbons**

Three layer design, with two clear PVC layers sandwiched around a polyester fibre armature.

**Advantages**

The composition of the Tricofuel hose material compound is designed specially for hydrocarbon transfer. Thus, it retains its flexibility, even after intensive use. It withstands repeated bending, whilst also offering excellent resistance to ageing.



- 1 Flexible clear green PVC outer coating
- 2 Fibre reinforcement
- 3 Smooth clear green PVC core

**Marking : TRICOFUEL** [batch number]

The clear aspect of both the core and the coating provides for easy visual control of fluids transfer.

mm	± mm	mm	± mm	mm	g/m	Bar	mm	Green		
								25 m	50 m	
6,3	+/- 0,3	11	+/- 0,3	2,35	79	40	13	44	050985	050998
8	+/- 0,5	14	+/- 0,5	3	129	40	13	56	051162	051175
10	+/- 0,5	16	+/- 0,5	3	153	30	10	70	051246	051259
12	+/- 0,6	19	+/- 0,6	3,5	213	30	10	84	051204	051217
15	+/- 0,6	23	+/- 0,6	4	298	30	10	105	052274	
20	+/- 0,8	28	+/- 0,8	4	377	30	10	140	052680	052693
25	+/- 0,8	32,5	+/- 0,8	3,75	423	25	8	175	050843	050856
30	+/- 1,0	39	+/- 1,0	4,5	609	25	8	210	052883	

**Chemical resistance**

See table pages 47 to 51 column B.

**Connectors**

Band, worm drive, screw or butterfly clamps.  
Cap connectors.  
Swaged fittings can be used if they do not damage the hose.